

### Features:

- ◆ Efficiency Up to 90%
- ◆ Fixed Switching Frequency
- ◆ Regulated Outputs
- ◆ Remote On/Off
- ◆ Low No Load Power Consumption
- ◆ Fully Protected (OTP/OCP/OVP/UVLO)
- ◆ 3000V<sub>AC</sub> I/O Isolation
- ◆ Operating Case Temperature -40°C to +100°C
- ◆ Quarter Brick Size Meet Industrial Standard  
2.28"x1.45"x0.5"
- ◆ Safety Meets IEC/EN/UL 62368-1 2nd  
(Reinforce Insulation)
- ◆ Shock & Vibration MIL-STD-810F Compliant
- ◆ Fire & Smoke EN45545 Compliant
- ◆ 3000m Operating Altitude



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF. (2)	CAPACITOR LOAD MAX.		
			MIN.	MAX.	NO LOAD	FULL LOAD				
CFDQG75-300S03	180-450V <sub>DC</sub>	3.3V <sub>DC</sub>	0mA	15A	10mA	202mA	81.5	15000μF		
CFDQG75-300S05		5V <sub>DC</sub>		15A		299mA	83.5	15000μF		
CFDQG75-300S12		12V <sub>DC</sub>		6.25A		284mA	88	6250μF		
CFDQG75-300S15		15V <sub>DC</sub>		5A		278mA	90	5000μF		
CFDQG75-300S24		24V <sub>DC</sub>		3.12A		279mA	90	3300μF		
CFDQG75-300S48		48V <sub>DC</sub>		1.56A				280mA	89	1000μF

**NOTE:**

1. Nominal Input Voltage 300V<sub>DC</sub>
2. Measured at 300V<sub>IN</sub>
3. An External Input Capacitor 33μF for All Models are Recommended to Reduce Input Ripple Voltage

### PART NUMBER

Series	Nominal Input Voltage	Number of Outputs	Nominal Output Voltage	Remote On/Off Logic	Mounting Inserts
CFDQG75	II	O	XX	L	-Y (Option)
CFDQG75	300	S: Single	03:3.3V <sub>DC</sub> 05:5.0V <sub>DC</sub> 12:12V <sub>DC</sub> 15:15V <sub>DC</sub> 24:24V <sub>DC</sub> 48:48V <sub>DC</sub>	None:Positive N:Negative	None:M3x0.5 Mounting Inserts -C: Clear Mounting Insert (3.2mm DIA.) -F: Flanged Baseplate with M3 mounting insert

**Part Number Example:**

CFQG75-300S12N-C:Quarter Brick,75W, 2:1 180-450V<sub>dc</sub> Input, Single 12V<sub>dc</sub> Output, Negative Logic, Clear Mounting Insert

### TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25 °C unless otherwise noted.)

#### ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Continuous	All	-0.3		450	V <sub>DC</sub>
Input Surge Voltage	100ms max.	All			500	V <sub>DC</sub>
Operating Case Temperature	At the Center Part of Base Plate	All	-40		105	°C
Storage Temperature		All	-55		125	°C

#### INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Input Voltage		All	180	300	450	V <sub>DC</sub>
Input Under Voltage Lockout						
Turn-On Voltage Threshold		All	165	170	175	V <sub>DC</sub>
Turn-Off Voltage Threshold		All	155	160	165	V <sub>DC</sub>
Lockout Hysteresis Voltage		All		10		V <sub>DC</sub>
Maximum Input Current	V <sub>in</sub> =180V, Full Load.	3.3Vo 05Vo Others		350 520 477		mA
No-Load Input Current	V <sub>in</sub> =300V, I <sub>o</sub> =0A	See Model Number Table				mA
Input Filter	Pi filter.	All				
Inrush Current (I <sup>2</sup> t)	As per ETS300 132-2.	All			0.1	A <sup>2</sup> s
Input Reflected Ripple Current	P-P thru 12uH inductor, 5Hz to 20MHz.	All		30		mA

#### OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units	
Voltage Set Point Accuracy	V <sub>in</sub> =300V, Full Load, T <sub>c</sub> =25 °C	All	-1.0		+1.0	%	
Output Voltage Regulation							
Load Regulation	Full Load to No Load	All			±0.2	%	
Line Regulation	V <sub>in</sub> =High Line to Low Line, Full Load	All			±0.2	%	
Temperature Coefficient	T <sub>c</sub> =-40°C to 105°C	All			±0.02	%/°C	
Output Voltage Ripple and Noise (5Hz to 20MHz bandwidth)							
Peak-to-Peak	Output ripple and noise measured with an external MLCC 1000pF connected between -Vin to Case, and 10uF aluminum and 1uF ceramic capacitor across output for 48V <sub>out</sub> , and with 10uF tantalum and 1uF ceramic capacitor for others.	3.3Vo			100	mV	
		05Vo			100		
		12Vo			150		
		15Vo			150		
		24Vo			240		
		48Vo			240		
RMS.		3.3Vo			60		mV
		05Vo			60		
		12Vo			60		
		15Vo			60		
	24Vo			100			
	48Vo			100			
Output Current Range	V <sub>in</sub> = 180 to 450V	See Model Number Table				A	
Over Current Protection	Hiccup Mode. Auto Recovery.	All	110	135	160	%	
Short Circuit Protection		All	Continuous, Auto Recovery.				
External Load Capacitance	Full load (resistive)	See Model Number Table				uF	

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Trim Range	$P_o \leq \text{max rated power}, I_o \leq I_{o\_max}$	3.3Vo	-20		+10	%
		05Vo			+20	
		Others	-20	+20		
Output Voltage Remote Sense Range	$P_o \leq \text{max rated power}, I_o \leq I_{o\_max}$ % of nominal Vo	3.3Vo			+10	%
		05Vo			+20	
		All				
Over Voltage Protection	Limited Voltage, % of Nominal Vo	3.3Vo	112		130	%
		05Vo			130	
		Others	122	130		

## EFFICIENCY

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
100% Load	Vin=300V, Full Load.	See Model Number Table				%

## DYNAMIC CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Current Transient						
Error Band	75% to 100% of $I_{o\_max}$ step load change $d_i/d_t=0.1A/us$ (within 1% Vout nominal)	All			±5	%
Recovery Time		All			250	us
Turn-On Delay and Rise Time	Full load (Constant resistive load)					
Turn-On Delay Time, From On/Off Control	$V_{on/off}$ to 10% $V_{o\_set}$ , Remote On	All		30		ms
Turn-On Delay Time, From Input	$V_{in\_min}$ to 10% $V_{o\_set}$ , Power Up	All		30		ms
Output Voltage Rise Time	10% $V_{o\_set}$ to 90% $V_{o\_set}$	All		30		ms

## ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Isolation Voltage (100% factory Hi-Pot tested @2sec.)	1 minute; Input to Output,	All			3000 4200	$V_{AC}$ $V_{DC}$
	1 minute; Input to Case (Base Plate),	All			2500 3500	$V_{AC}$ $V_{DC}$
	1 minute; Output to Case (Base Plate)	All			500 700	$V_{AC}$ $V_{DC}$
Isolation Resistance	Input to Output	All	100			MΩ
Isolation Capacitance	Input to Output	All		333		pF
	Input to Case (Base Plate)	All		None		
	Output to Case (Base Plate)	All		4400		

## FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	Pulse wide modulation (PWM), Fixed	All	270	300	330	KHz
On/Off Control, Positive Remote On/Off logic, Refer to -Vin pin.						
Logic Low (Module Off)	$V_{on/off}$ at $I_{on/off}=1.0mA$	All	0		1.2	V
Logic High (Module On)	$V_{on/off}$ at $I_{on/off}=0.0uA$ , Pin open=On	All	3.5		75	V
On/Off Control, Negative Remote On/Off logic, Refer to -Vin pin						
Logic High (Module Off)	$V_{on/off}$ at $I_{on/off}=0.0uA$ , Pin open=Off	All	3.5		75	V
Logic Low (Module On)	$V_{on/off}$ at $I_{on/off}=1.0mA$	All	0		1.2	V
On/Off Current (for both remote on/off logic)	$I_{on/off}$ at $V_{on/off}=0V$	All		0.3	1	mA
Leakage Current (for both remote on/off logic)	Logic High, $V_{on/off}=15V$	All			30	uA
Off Converter Input Current	Shutdown input idle current	All		5	10	mA
Over Temperature Shutdown	Temperature at the Center Part of Base Plate, Non-Latching	All		110		°C

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Over Temperature Recovery		All		100		°C

### GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	$I_o=100\%$ of $I_{o,max}$ ; MIL-HDBK - 217F_Notice 1, GB, 25°C	300S03		850		K hours
		300S05		850		
		300S12		850		
		300S15		850		
		300S24		850		
		300S48		1050		
Weight		All		61		grams
Case Material	Plastic, DAP, UL 94V-0					
Base plate Material	Aluminum					
Potting Material	UL 94V-0					
Pin Material	Base: Copper Plating: Nickel with Matte Tin					
Shock/Vibration	MIL-STD-810F Compliant					
Humidity	95% RH max. Non Condensing					
Altitude	3000m Operating Altitude, 12000m Transport Altitude					
Thermal Shock	MIL-STD-810F					
Fire & Smoke	EN45545-2 Compliant					
EMI	Meets EN55032 & EN55022 Compliant (with external filter)					Class A
ESD	EN61000-4-2	Level 3: Air $\pm 8kV$ , Contact $\pm 6kV$				Perf. Criteria A
Radiated immunity	EN61000-4-3	Level 3: 80~1000MHz, 20V/m				Perf. Criteria A
Fast Transient	EN61000-4-4	Level 3: On power input port, $\pm 2kV$ , external input capacitor required				Perf. Criteria A
Surge	EN61000-4-5	Level 4: Line to earth, $\pm 4kV$ , Line to line, $\pm 2kV$				Perf. Criteria A
Conducted immunity	EN61000-4-6	Level 3: 0.15~80MHz, 10V				Perf. Criteria A
Power Frequency Magnetic Field immunity	EN61000-4-8	50/60Hz, 3A/m (r.m.s.)				Perf. Criteria A

### Immunity to Environmental Conditions

Phenomenon	Reference Clause	Reference Standard	Test Conditions	Result
Vibration Test	MIL-STD-810F Table 514.5C-VIII Figure 514.5C-6	MIL-STD-810F	Unit are non-operating Vibration Waveform: Random Vibration Frequency: 15 ~ 2000Hz Total Grms: 4.01997 grms Vibration axis: X, Y, Z axis Duration: 1hr/axis	Pass
Shock Test	MIL-STD-810F 516.5 Table 516.5-I	MIL-STD-810F	Wave form: Sawtooth wave Test Category: Crash Hazard Test for Ground Equipment Duration: 10 ms Peak Acceleration: 75 G Cross-over Frequency: 80 Hz No. of Shock: Each axis 3 times Shock Direction:	Pass
Thermal Shock Cycling Test	MIL-STD-810F 503.4 Figure 503.4-1	MIL-STD-810F	Temperature: -55°C to 100°C Humidity: 95%RH Duration: 8hrs/ 3 times cycling & 4hrs dwell time	Pass
Thermal Humidity Cycling Test	MIL-STD-810F Notice 3 Method 507.4	MIL-STD-810F	Temperature: 60°C to 30°C Humidity: 95%RH Duration: 240 hrs	Pass


### EN45545-2 Fire & Smoke Test Conditions

Item		Standard	Hazard Level
R22	Oxygen Index Test	EN 45545-2: 2013 EN ISO 4589-2: 2006	HL1,HL2,HL3
	Smoke Density Test	EN 45545-2: 2013 EN ISO 5659-2: 2013	HL1,HL2
	Smoke Toxicity Test	EN 45545-2: 2013 NF X70-100: 2006	HL1,HL2,HL3
R23	Oxygen Index Test	EN 45545-2: 2013 EN ISO 4589-2: 2006	HL1,HL2,HL3
	Smoke Density Test	EN 45545-2: 2013 EN ISO 5659-2: 2013	HL1,HL2,HL3
	Smoke Toxicity Test	EN 45545-2: 2013 NF X70-100: 2006	HL1,HL2,HL3
R24	Oxygen Index Test	EN45545-2: 2013 EN ISO 4589-2	HL1,HL2,HL3
R25	Glow - Wire Test	EN 45545-2:2013 EN 60695-2-11:2001	HL1,HL2,HL3
R26	Vertical Flame Test	EN 45545-2: 2013 EN 60695-11-10: 2013	HL1,HL2,HL3


## CHARACTERISTIC CURVE

### Power Derating Curve


CFDQG75-300S03,05 Derating Curve without Heatsink (Vin=300Vdc)

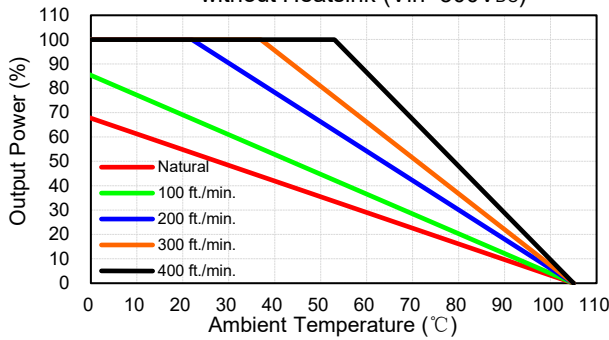


CFDQG75-300S12,15,24,48 Derating Curve without Heatsink (Vin=300Vdc)

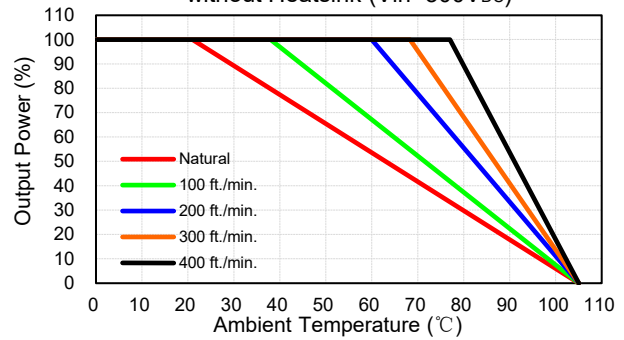


CFDQG75-300S03,05 Derating Curve with Heatsink QBL127 (Vin=300Vdc)

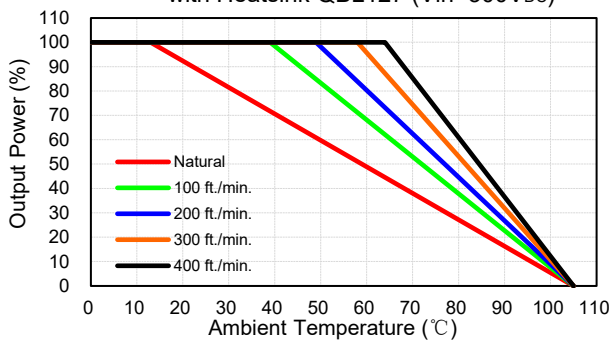


CFDQG75-300S12,15,24,48 Derating Curve with Heatsink QBL127 (Vin=300Vdc)

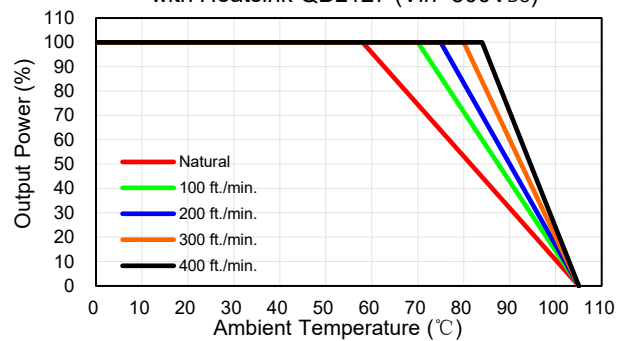

CFDQG75-300S03,05 Derating Curve with Heatsink QBT210 (Vin=300V<sub>DC</sub>)

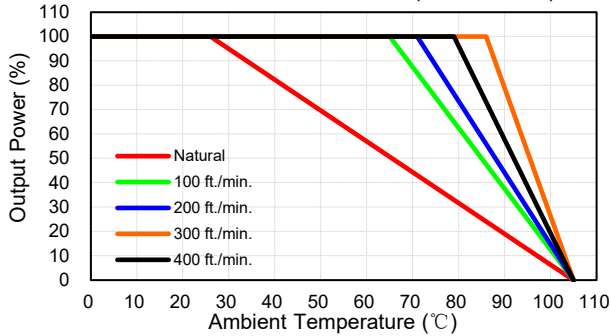


CFDQG75-300S12,15,24,48 Derating Curve with Heatsink QBL127 (Vin=300V<sub>DC</sub>)

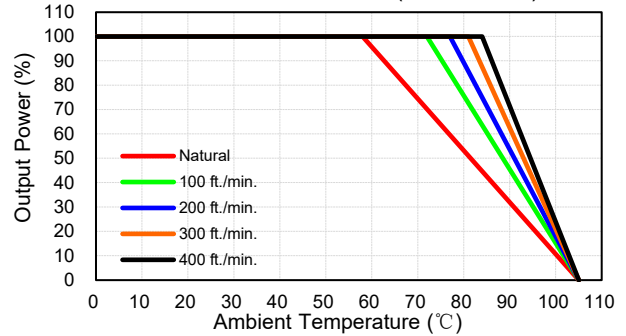


### Performance Data


CFDQG75-300S03 Eff/Io @25 Deg. C

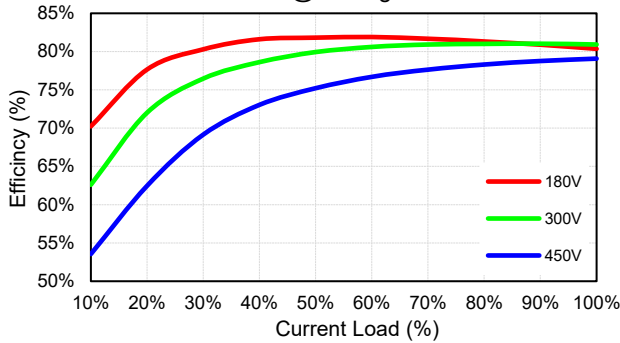


CFDQG75-300S03 Pd/Po @25 Deg. C

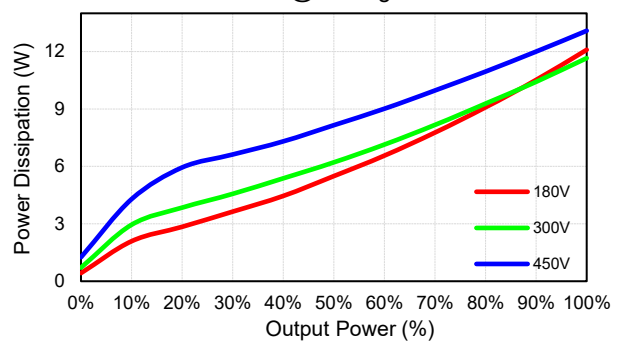


CFDQG75-300S05 Eff/Io @25 Deg. C

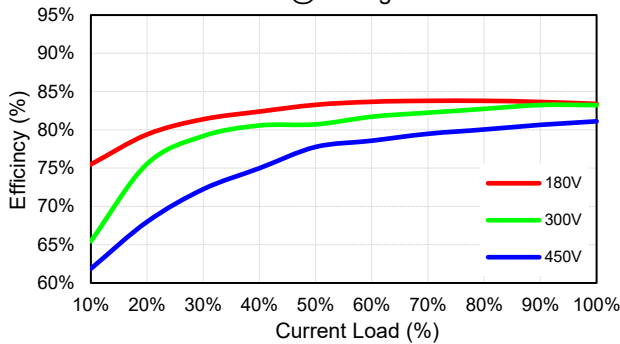


CFDQG75-300S05 Pd/Po @25 Deg. C

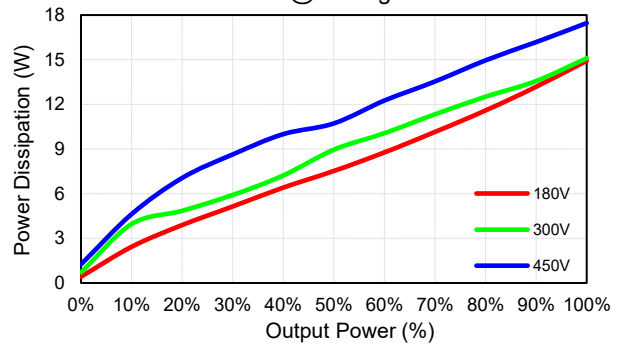


CFDQG75-300S12 Eff/Io @25 Deg. C

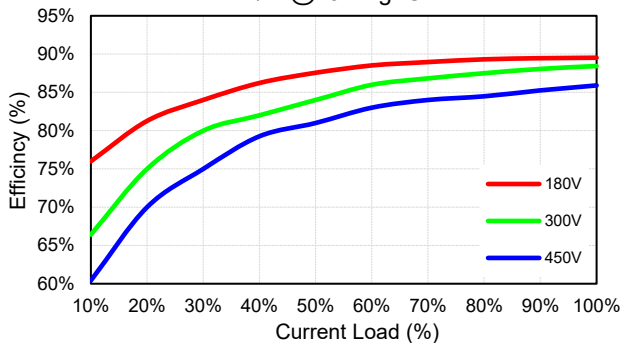


CFDQG75-300S12 Pd/Po @25 Deg. C

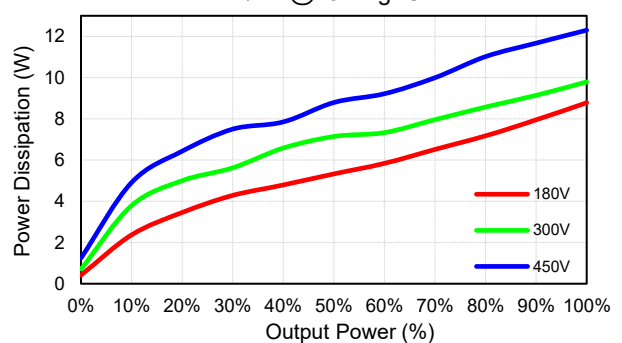


CFDQG75-300S15  
Eff/Io @25 Deg. C

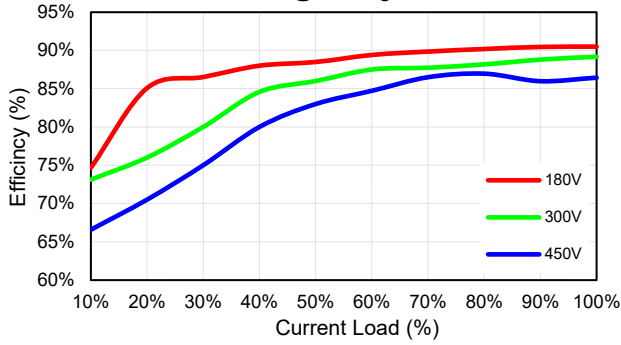


CFDQG75-300S15  
Pd/Po @25 Deg. C

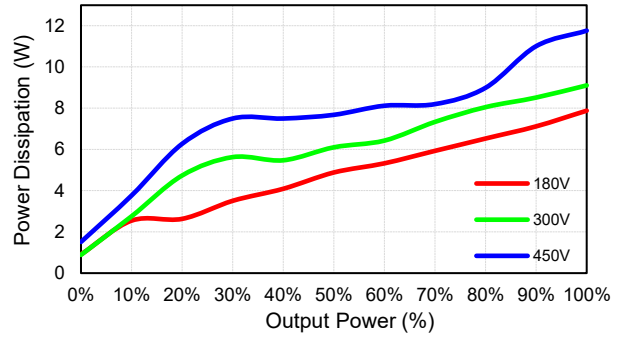


CFDQG75-300S24  
Eff/Io @25 Deg. C

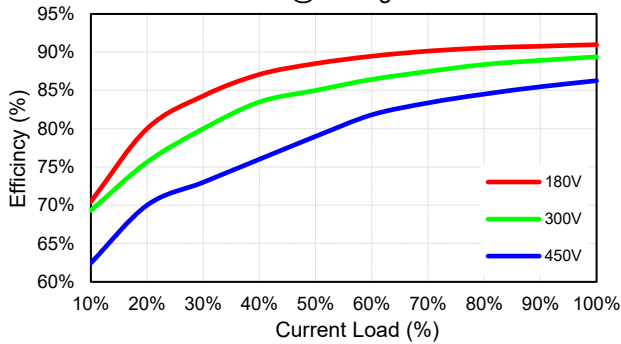


CFDQG75-300S24  
Pd/Po @25 Deg. C

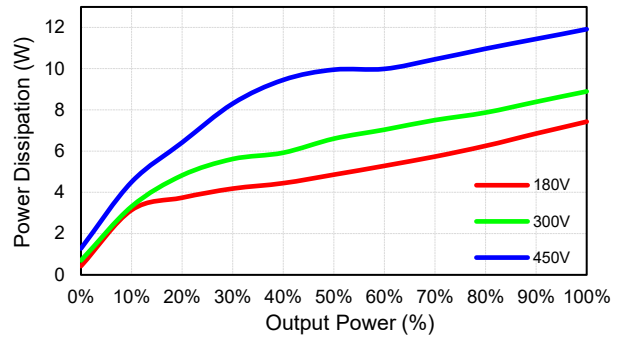


CFDQG75-300S48  
Eff/Io @25 Deg. C

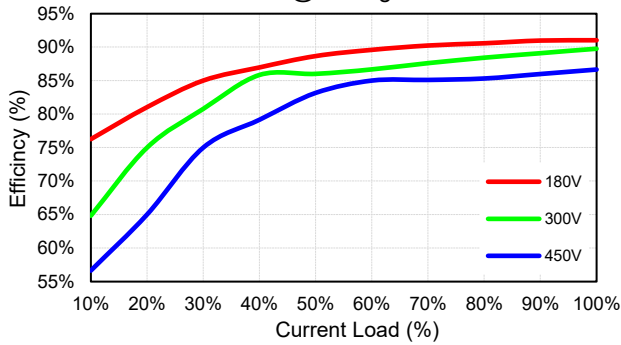


CFDQG75-300S48  
Pd/Po @25 Deg. C

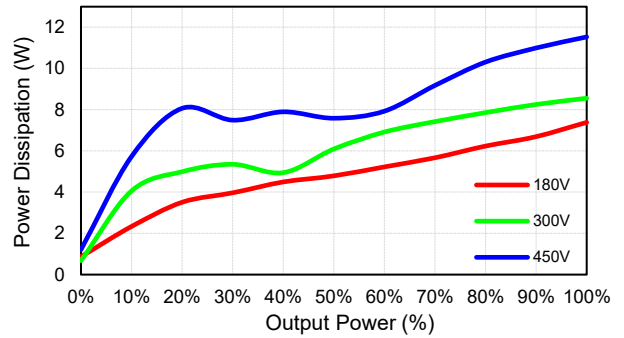

### MECHANICAL SPECIFICATION

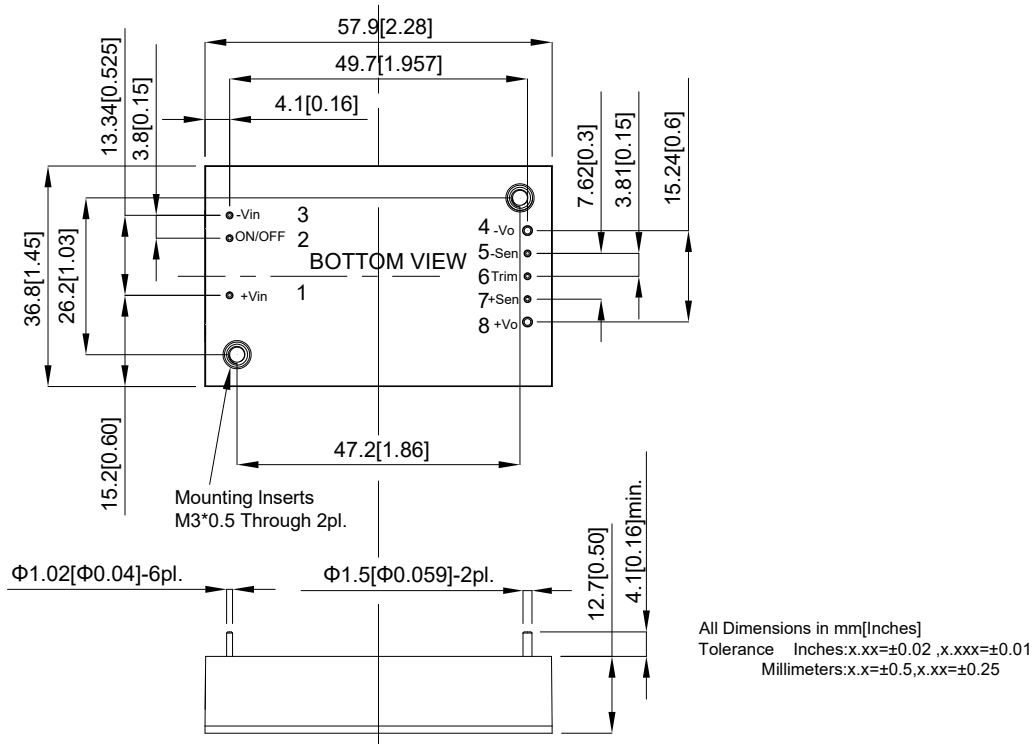

### -F: Flanged Baseplate

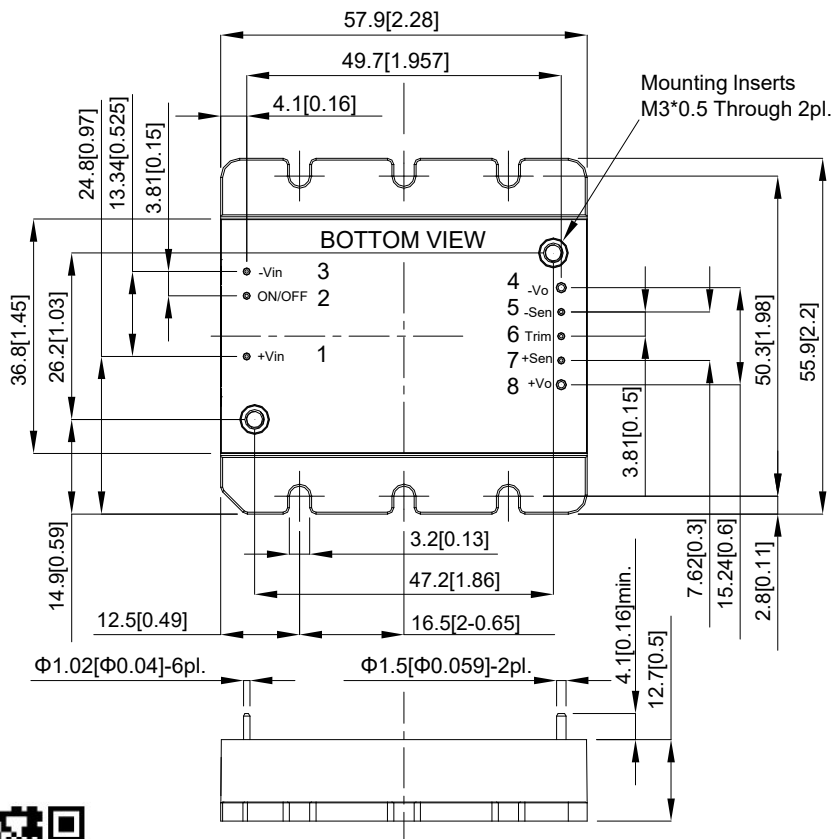

**CHEWINS Beijing Science & Technology Co.,Ltd.**

Address: No.25, torch South Street, Zhuzhou Development Zone, Hebei Province, people's Republic of China  
Tel: 86-10-68817997    Mobile phone: 15901068673    E-mail: sales@chewins.net    www.chewins.net